

DASHANG
大上电器

青岛大上电器有限公司
Qingdao Dashang Electric Appliance Co.,Ltd.

青岛凯创电器有限公司
Qingdao Kaichuang Electric Appliance Co., Ltd

青岛中科绿能冷冻技术有限公司
Qingdao Zocoln Refrigeration Technology Co.,Ltd.

江苏科冷节能有限公司
Jiangsu Keleng Energy-saving Co., Ltd.

Qingdao Dashang Electric Appliance Co., Ltd
No. 70 Jinsheng 1 Road, Chengyang District, Qingdao, Shandong Province, China

🌐 Web: www.dashangrefrigeration.com

✉ Email: info@dashangrefrigeration.com

2025 | HOTEL&RESTAURANT
CATERING
EQUIPMENT

STAINLESS STEEL CABINET PRODUCT MANUAL

We are the long-term partner of foreign
customers such as LAWSON, FamilyMart and Walmart
Our full range of products
have entered more than 60 countries and regions



DASHANG
大上电器



www.dashangrefrigeration.com
Email: info@dashangrefrigeration.com

**DA
SH
ANG**



Over the past decade,
Dashang has provided outstanding refrigeration services and
products to customers in
more than 60 countries around the world.

CONTENTS.

ABOUT COMPANY

About Company	01
Dashang's Production Capability	02

REACH-IN

Stainless Steel Reach-In Cabinet	03/04
NA Reach-in refrigerator and freezer	05/06
GN Reach-in refrigerator and freezer	07/10
Reach-in refrigerator and freezer	11/12

TABLES

Undercounter refrigerator and freezer	15/16
GN1/1 Undercounter refrigerator and freezer	17/19
Euronorm 600*400 refrigerator and freezer counter	21
Pizza undercounter refrigerator	22





Pillars

Craftsmanship, Creativity,
Quality, Synergy

Value

Innovation, Cooperation,
Sustainability, Integrity

Vision

Together to create a
cooler world



For 23 years, dashang has dedicated to meet the needs of various segments in the global commercial refrigeration field, relying on exceptional craftsmanship, creativity, quality, and synergy.

Our product range includes refrigerated display cabinets, stainless steel cabinets, refrigeration units, and panels, catering to the various needs of retail, food and beverage, and Ho.Re.Ca. markets, providing a one-stop shopping service.

We consistently commits to learning from global markets, providing partners with the latest market insights, extensive product experience, and reliable products, to benefit the partners' brands and their final users.

DASHANG'S PRODUCTION CAPABILITY

Dashang's production capabilities are marked by advanced technology and a commitment to efficiency. Our manufacturing facilities, equipped with state-of-the-art machinery and spanning extensive areas, enable us to produce a wide variety of commercial refrigeration products.




The integration of automated processes and rigorous quality control systems ensures that our products meet the highest standards of reliability and performance. With a focus on innovation and sustainability, Dashang continually adapts its production methods to align with global market demands and environmental considerations. This robust production infrastructure positions us to effectively serve our diverse clientele across the world.




- Flat Shelves Can Be Removed For Cleaning Easily
- Smaller size, more flexible
- Large panoramic glass door



- Digital controller IP68
- Energy saving and high efficiency
- Using R290 refrigerant

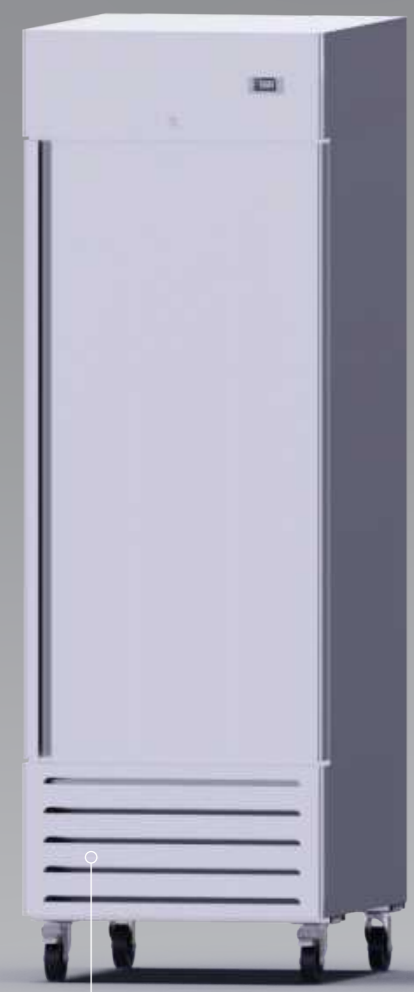

NA 27R

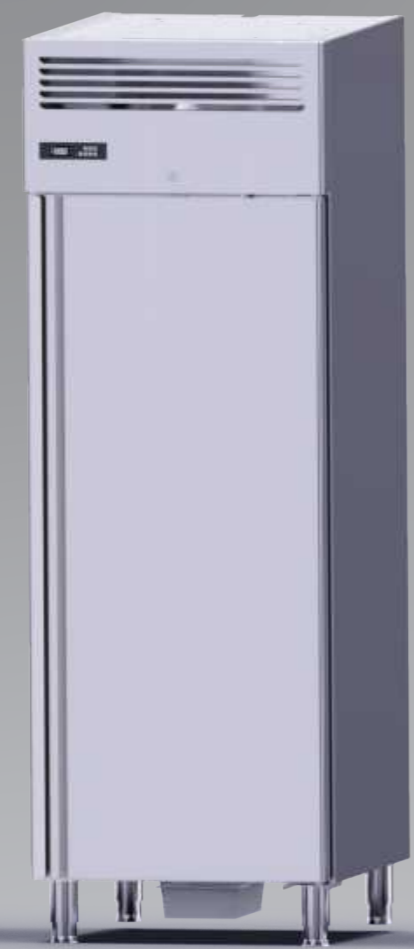

SNACK 400




GN 600



GN 650



GN 650G

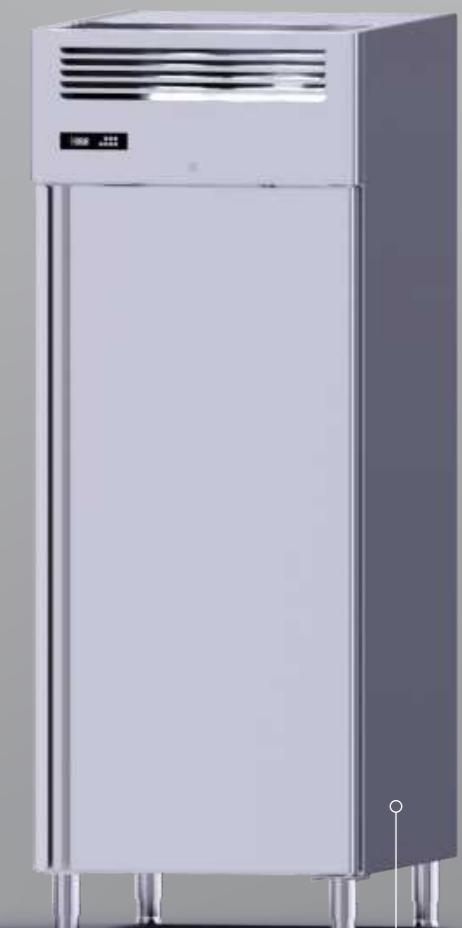


GE 800

- 4 wheels, 2 with brake
- Undermount Unit
- Self-closing door
- Large capacity




- Large capacity
- 10 adjustable shelves
- Self-closing door
- Large capacity
- Digital controller IP68



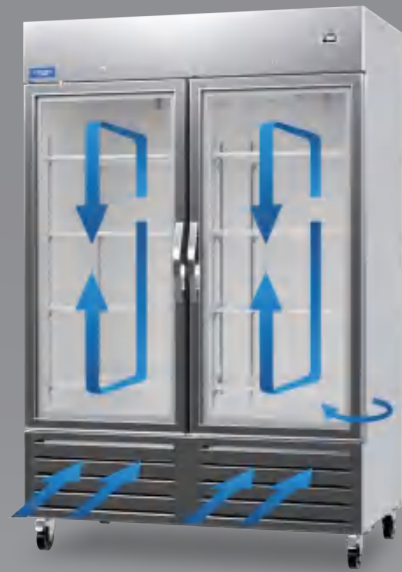

NA Reach-in refrigerator and freezer

- Adjustable feet
- Evaporating dish
- Easy to use
- Automatic hot gas defrost
- LED lightening
- Ambient Temperature: +30°C & 60% Humidity

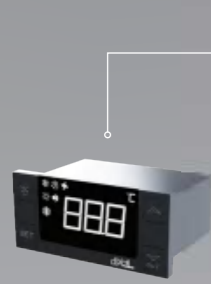

XR02CX-4N1F1
Controlador digital IP68



54R



27R



81R



EVAPORATOR

Copper tube and aluminum fins with hydrophilic coating



MODEL	27R	27RG	54R	54RG	81R	81RG
MEASURES (MM)	680×830×2100		1370×830×2100		2060×830×2100	
MEASURES (INCHES)	26.77×32.68×82.68		53.94×32.68×82.68		81.10×32.68×82.68	
TEMPERATURE	+33°F/+E1341°F +0.5°C/+5°C					
ELECTRICAL DATA	115V-60HZ					
THICKNESS	70mm					
ISOLATION	40kg/m ³ / CFC-Free					
VOLUME(L)	540		1125		1745	
CAPACITY(CUFT)	18		40		62	
DOORS	1		2		3	
SHELVES	3		6		9	
DEFROST	Compressor off					
REFRIGERANT	R290					
40'HC LOAD	39		16		13	



MODEL	27R	27RG	54R	54RG	81R	81RG
MEASURES (MM)	680×830×2100		1370×830×2100		2060×830×2100	
MEASURES (INCHES)	26.77×32.68×82.68		53.94×32.68×82.68		81.10×32.68×82.68	
TEMPERATURE	-10°F/+10°F -23.33°C/-12.22°C					
ELECTRICAL DATA	115V-60HZ					
THICKNESS	70mm					
ISOLATION	40kg/m ³ / CFC-Free					
VOLUME(L)	540		1125		1745	
CAPACITY(CUFT)	18		40		62	
DOORS	1		2		3	
SHELVES	3		6		9	
DEFROST	Hot gas					
REFRIGERANT	R290					
40'HC LOAD	39		16		13	



GN Reach-in refrigerator and freezer

- Automatic defrost
- Ambient Temperature: +40°C & 60% Humidity
- Thicker stainless steel plate, wear-resistant and durable
- Reversible self-closing door
- Thick foam layer, excellent thermal insulation
- Digital thermometer
- Lock fitted



- Copper tube evaporator, resistant to corrosion, with a long using life
- Huge transparent glass door available, perfect good visibility

GN1410TNG



Digital controller IP68



Features a drain for convenient internal cleaning



GN600TNG



GN650TN



GN1200TN



MODEL	GN650BT	GN650BTG	GN1410BT	GN1410BTG
MEASURES (MM)	740×810×2010		1480×810×2010	
TEMPERATURE	-2°C/+8°C			
ELECTRICAL DATA	220~240V/50(60)HZ			
THICKNESS	70mm			
ISOLATION	40kg/m ³ / CFC-Free			
VOLUME(L)	650		1410	
CAPACITY(CUFT)	590		1295	
DOORS	1		2	
TYPE OF COOLING	Ventilated			
SHELVES	3,GN2/1		6,GN2/1	
DEFROST	Compressor off			
REFRIGERANT	R290			
40°C LOAD	42		21	



MODEL	GN650BT	GN650BTG	GN1410BT	GN1410BTG
MEASURES (MM)	740×810×2010		1480×810×2010	
TEMPERATURE	-18°C/-24°C			
ELECTRICAL DATA	220~240V/50(60)HZ			
THICKNESS	70mm			
ISOLATION	40kg/m ³ / CFC-Free			
VOLUME(L)	650		1410	
CAPACITY(CUFT)	590		1295	
DOORS	1		2	
TYPE OF COOLING	Ventilated			
SHELVES	3,GN2/1		6,GN2/1	
DEFROST	Compressor off			
REFRIGERANT	R290			
40°C LOAD	42		21	

MODEL	GN600TN	GN600TNG	GN600TNV	GN600TNGV
MEASURES (MM)	680x810x2010			
TEMPERATURE	-2°C/+8°C	-2°C/+10°C	-2°C/+8°C	-2°C/+10°C
CLIMATIC CLASS	5-40°C			
ELECTRICAL DATA	220~240V/50(60)HZ			
THICKNESS	70mm			
ISOLATION	40kg/m ³ / CFC-Free			
VOLUME(L)	560			
CAPACITY(CUFT)	507			
DOORS	1			
TYPE OF COOLING	Static		Ventilated	
SHELVES	3,GN2/1			
DEFROST	Compressor off			
REFRIGERANT	R290			
40'HC LOAD	44			

MODEL	GN600BT	GN600BTG	GN600BTV	GN600BTGV
MEASURES (MM)	680x810x2010			
TEMPERATURE	-16°C/-20°C			
CLIMATIC CLASS	5-40°C			
ELECTRICAL DATA	220~240V/50(60)HZ			
THICKNESS	70mm			
ISOLATION	40kg/m ³ / CFC-Free			
VOLUME(L)	560			
CAPACITY(CUFT)	507			
DOORS	1			
TYPE OF COOLING	Static		Ventilated	
SHELVES	3,GN2/1			
DEFROST	Hot gas			
REFRIGERANT	R290			
40'HC LOAD	44			

MODEL	GN1200TN	GN1200TNG	GN1200BT	GN1200BTV
MEASURES (MM)	1360x810x2010			
TEMPERATURE	-2°C/+8°C		-16°C/-20°C	
CLIMATIC CLASS	5-40°C			
ELECTRICAL DATA	220~240V/50(60)HZ			
THICKNESS	70mm			
ISOLATION	40kg/m ³ / CFC-Free			
VOLUME(L)	1160			
CAPACITY(CUFT)	1050			
DOORS	2			
TYPE OF COOLING	Static	Ventilated	Static	Ventilated
SHELVES	6,GN2/1			
DEFROST	Compressor off		Hot gas	
REFRIGERANT	R290			
40'HC LOAD	21			



Reach-in refrigerator and freezer



- Adjustable feet and wheel
- Evaporating dish
- Easy to clean and durable
- Auto Defrost
- LED lightening
- Outer body: SS304/SS430
- Interior:Stainless Steel(SS304)
- Aluminum Painted(option)



MODEL	SNACK400BT	GE800BT	PA800BT
MEASURES (MM)	680×810×2010	740×990×2010	740×990×2010
TEMPERATURE	-2°C/+8°C		
ELECTRICAL DATA	220~240V/50(60)HZ		
THICKNESS	70mm		
ISOLATION	40kg/m ³ / CFC-Free		
VOLUME(L)	450	835	835
CAPACITY(CUFT)	429	746	746
DOORS	1	1	1
SHELVES	3	10,800*600	guide 7 set
DEFROST	Compressor off		
REFRIGERANT	R290		
40'HC LOAD	48	35	



MODEL	SNACK400BT	GE800BT	PA800BT
MEASURES (MM)	680×810×2010	740×990×2010	740×990×2010
TEMPERATURE	-16°C/-20°C		
ELECTRICAL DATA	220~240V/50(60)HZ		
THICKNESS	70mm		
ISOLATION	40kg/m ³ / CFC-Free		
VOLUME(L)	450	835	835
CAPACITY(CUFT)	429	746	746
DOORS	1	1	1
SHELVES	3	10,800*600	guide 7 set
DEFROST	Compressor off		
REFRIGERANT	R290		
40'HC LOAD	48	35	

- modern and simple design of front with a large opening
- rear-mounted unit
- 4 castors, 2 with brake




- Double glass shelves
- Static cooling in the tank
- Self-closing door
- Large capacity




- Granite worktop
- Self-closing door
- Large capacity
- Digital controller IP68



- Extensive display solutions with customizable configurations to expertly showcase all types of unpackaged refrigerated products: fresh meats, artisanal charcuterie, and gourmet delicatessen items.
- Digital controller IP68
- Energy saving and high efficiency
- Using R290 refrigerant
- Self-closing door





Undercounter refrigerator and freezer



TUC27R

- Adjustable feet and wheel
- Ambient Temperature: +35°C & 60% Humidity
- Auto Defrost
- Easy to clean and durable
- Interior: Aluminum Painted/#304 Stainless
- Large space
- LED lightening
- Outer body: SS304/SS430



TUC48R



XR02CX-4N1F1
Controlador digital IP68



- modern and simple design of front with a large opening
- rear-mounted unit
- 4 castors, 2 with brake



MODEL	TUC27R	TUC48R	TUC60R	TUC72R
MEASURES	707×760×905	1227×760×905	1552×760×905	1844.5×760×905
TEMPERATURE	0.5°C~5°C			
CLIMATIC CLASS	5-35°C			
ELECTRICAL DATA	115V-60HZ			
ISOLATION	40kg/m ³ / 70mm			
VOLUME(L)	170L	315L	407L	490L
CAPACITY(CUFT)	6	11.1	14.4	17.3
DOORS	1	2	2	3
SHELVES	1	2	2	3
DEFROST	Compressor off			
REFRIGERANT	R290			
40'HC LOAD	60	46	28	28



MODEL	TUC27R	TUC48R	TUC60R	TUC72R
MEASURES	707×760×905	1227×760×905	1552×760×905	1844.5×760×905
TEMPERATURE	-23.33°C~-12.22°C			
CLIMATIC CLASS	5-35°C			
ELECTRICAL DATA	115V-60HZ			
ISOLATION	40kg/m ³ / 70mm			
VOLUME(L)	170L	315L	407L	490L
CAPACITY(CUFT)	6	11.1	14.4	17.3
DOORS	1	2	2	3
SHELVES	1	2	2	3
DEFROST	Hot gas			
REFRIGERANT	R290			
40'HC LOAD	60	46	28	28

GN1/1 Undercounter refrigerator and freezer




GN4100TN



GN3100TN

- Thick stainless steel plate, wear-resistant and durable
- Copper tube evaporator, resistant to corrosion, with a long using life
- Solid transparent glass door available, perfect good visibility

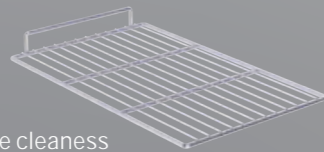


Flat gasket, easily removable cleanliness

XR02CX-4N1F1
Controlador digital IP68



- Thick foam layer, excellent thermal insulation
- Splashback fitted as standard
- Drawers available as separate kits
- Removeable table top
- Internal LED light
- Automatic defrost
- Digital thermometer



MODEL	GN2100TN	GN3100TN	GN4100TN
MEASURES	1355×700×850	1790×700×850	2225×700×850
TEMPERATURE	-2°C/+8°C		
CLIMATIC CLASS	5-35°C		
ELECTRICAL DATA	220~240V/50HZ~230V/60HZ(Optional)		
ISOLATION	40kg/m ³ / 60mm		
COOLING SYSTEM	Ventilated		
VOLUME(L)	280	420	550
CAPACITY(CUFT)	270	400	530
DOORS	2	3	4
SHELVES	2	3	4
DEFROST	Compressor off		
REFRIGERANT	R290		
40'HC LOAD	50	38	32
POWER(W)	210	210	280
CONSUMPTION(KWH/24H)	2.45	2.45	2.8
ENERGY CLASS	C	C	C



MODEL	GN2100BT	GN3100BT	GN4100BT
MEASURES	1355×700×850	1790×700×850	2225×700×850
TEMPERATURE	-18°C/-22°C		
CLIMATIC CLASS	5-35°C		
ELECTRICAL DATA	220~240V/50HZ~230V/60HZ(Optional)		
ISOLATION	40kg/m ³ / 60mm		
COOLING SYSTEM	Ventilated		
VOLUME(L)	280	420	550
CAPACITY(CUFT)	270	400	530
DOORS	2	3	4
SHELVES	2	3	4
DEFROST	Hot gas		
REFRIGERANT	R290		
40'HC LOAD	50	38	32
POWER(W)	600	610	735
CONSUMPTION(KWH/24H)	10	11.5	13.8
ENERGY CLASS	C	C	C



MODEL	SNACK2100TN	SNACK3100TN	GN4100TN
MEASURES	1355×600×850	1790×600×850	2225×600×850
TEMPERATURE	-2°C/+8°C		
CLIMATIC CLASS	5-35°C		
ELECTRICAL DATA	220~240V/50HZ~230V/60HZ(Optional)		
ISOLATION	40kg/m ³ / 60mm		
COOLING SYSTEM	Ventilated		
VOLUME(L)	240	360	480
CAPACITY(CUFT)	230	345	460
DOORS	2	3	4
SHELVES	2	3	4
DEFROST	Compressor off		
REFRIGERANT	R290		
40'HC LOAD	50	38	32
POWER(W)	210	210	280
CONSUMPTION(KWH/24H)	2.45	2.45	2.8
ENERGY CLASS	C	C	C



MODEL	SNACK2100TN	SNACK3100TN	GN4100TN
MEASURES	1355×600×850	1790×600×850	2225×600×850
TEMPERATURE	-18°C/-22°C		
CLIMATIC CLASS	5-35°C		
ELECTRICAL DATA	220~240V/50HZ~230V/60HZ(Optional)		
ISOLATION	40kg/m ³ / 60mm		
COOLING SYSTEM	Ventilated		
VOLUME(L)	240	360	480
CAPACITY(CUFT)	230	345	460
DOORS	2	3	4
SHELVES	2	3	4
DEFROST	Hot gas		
REFRIGERANT	R290		
40'HC LOAD	50	38	32
POWER(W)	600	610	735
CONSUMPTION(KWH/24H)	10	11.5	13.8
ENERGY CLASS	/	/	/



Pizza undercounter refrigerator



- Splashback fitted as standard
- Guide for 7 pizza trays each door
- Topping unit designed for GN pans
- Granite table top
- Automatic defrost
- Digital thermometer



Thick stainless steel plate, wear-resistant and durable

XR02CX-4N1F1
Controlador digital IP68



- Copper tube evaporator, resistant to corrosion, with a long using life
- Famous brand compressor


Euronorm 600*400 refrigerator and freezer counter



XR02CX-4N1F1
Controlador digital IP68



Flat gasket, easily removable for cleanliness

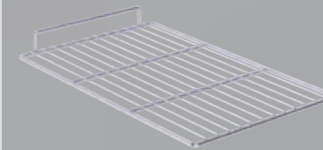

MODEL	PA2200TN	PA3100TN	PZ2600TN	PZ3600TN
MEASURES	1505x800x950	2015x800x850	1505x800x1000	2015x800x1000
TEMPERATURE	-2°C/+8°C			
CLIMATIC CLASS	5-35°C			
ELECTRICAL DATA	220-240V/50HZ			
ISOLATION	40kg/m ³ / 60m			
COOLING SYSTEM	Ventilated			
VOLUME(L)	390	580	390	580
CAPACITY(CUFT)	360	560	30	560
DOORS	2	3	2	3
SHELVES	2400*600	3400*600	2400*600	3400*600
DEFROST	Compressor off			
REFRIGERANT	R290			
40'HC LOAD	30	28	30	28
POWER(W)	235	347	270	347
CONSUMPTION(KWH/24H)	2.6	5.4	3.5	5.4
ENERGY CLASS	D			
OPTIONAL ELECTRICITY	230V/60HZ			